

EMPERATURE IS® PRESSURE TRANSDUCER

HEL-375 (M) CO SERIES

- Small Pressure Sensitive Area
- Patented Leadless Technology VIS®
- High Natural Frequency
- · No Internal Lead Flexing
- Extra Low G Sensitivity
- -65°F To 525°F Temperature Capability


The ruggedness of this sensor has not compromised its performance. It was designed for ease of installation and will operate properly in any medium compatible with 15-5 SS or SiO₂. Coupled with high temperature, its Patented Leadless Construction makes it possible for the sensing unit to be installed in such a way that will not compromise its high natural frequency.

Part performance not guaranteed if used in water.



5/8 HEX.

Kulite recommends the KSC Series of signal conditioners to maximize the measurement capability of the HEL-375-CO transducer.

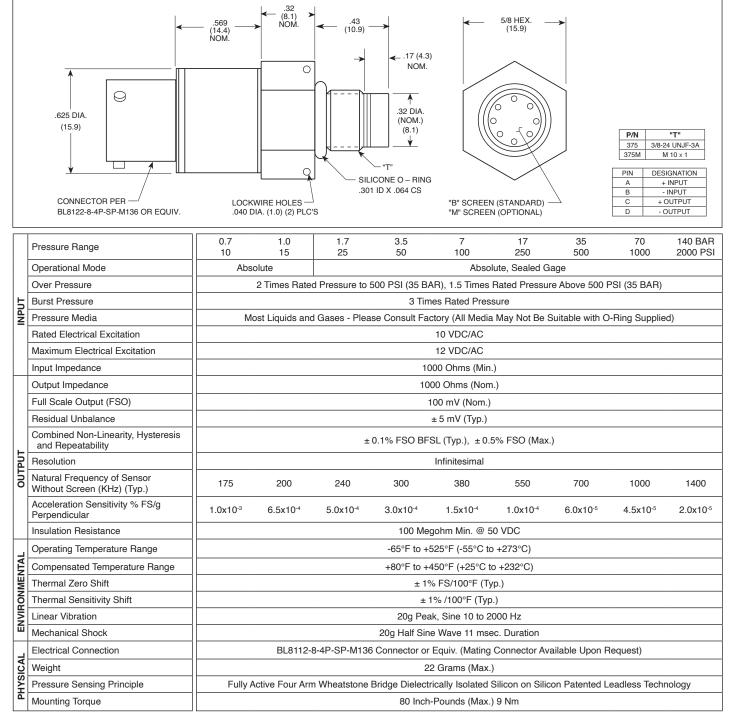

Note: Custom pressure ranges, accuracies and mechanical configurations available. Dimensions are in inches. Dimensions in parenthesis are in millimeters. All dimensions nominal. (D) Continuous development and refinement of our products may result in specification changes without notice. Copyright © 2020 Kulite Semiconductor Products, Inc. All Rights Reserved. Kulite miniature pressure transducers are intended for use in test and research and development programs and are not necessarily designed to be used in production applications. For products designed to be used in production programs, please consult the factory.