
## **FLANGE MOUNT ULTRAMINIATURE 5V OUTPUT** PRESSURE TRANSDUCER

## KZSM-400 SERIES

- Robust Construction
- Excellent Long Term Stability
- Designed For Industrial And
- Automotive Applications

The KZSM-400 is a miniature flange mount pressure transducer. The pressure transducer utilizes a patented silicon on silicon design. All wetted parts of the transducer are compatible with most automotive fluids.

For Installation Drawing, refer to Installation Standard Series, Page 3.

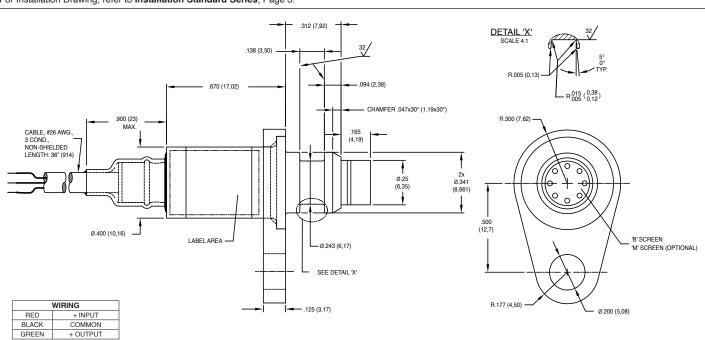

	Pressure Range	10 145	20 290	50 725	100 1450	250 3625	350 BAR 5075 PSI
	Operational Mode	Absolute, Sealed Gage					
INPUT	Over Pressure	1.5 Times Rated Pressure to a Maximum of 7500 PSI (517 BAR)					
	Burst Pressure	3 Times Rated Pressure to a Maximum of 7500 PSI (517 BAR)					
	Pressure Media	Any Liquid or Gas Compatible with 15-5 S/S, 316 SS, Inconel 625 and Kovar					
	Maximum Electrical Current	25 mA					
	Rated Electrical Excitation	8 to 16 VDC					
	Full Scale Reading	4.5V ± 1.5% (3 Wire System Single Ended Output)					
	Residual Unbalance	0.5V ± 75mV					
1	Output Impedance	<1000 Ohms					
DUTPUT	Bandwidth (-3dB)	DC to 3 KHz					
NO	Combined Non-Linearity, Hysteresis and Repeatability	±0.1% BFSL (Typ.), ±0.25% BFSL (Max.)					
	Resolution	Infinitesimal					
	Insulation Resistance	100 Megohm Min. @ 50 VDC					
AL	Operating Temperature Range	-67°F to +365°F (-55°C to +185°C)					
1 Ni	Compensated Temperature Range	+68°F to +347°F (+20°C to +175°C)					
ENVIRONMENTAL	Total Error Band (Excluding End Points)	± 1% FSO (Max.)					
NHN N	Linear Vibration	50g Peak, Sine 130-5000 Hz. (Max.)					
Ē	Mechanical Shock	20g half Sine Wave 11 msec. Duration					
PHYSICAL	Electrical Connection	3 Conductor 26 AWG Non-Shielded Cable 36" (914) Long					
	Weight	15 Grams (Nom) Excluding Cable					
	Pressure Sensing Principle	Fully Active Four Arm Wheatstone Bridge Dielectrically Isolated Silicon on Silicon					

Note: Custom pressure ranges, accuracies, mechanical configurations. Dimensions are in inches. Dimensions in parenthesis are in millimeters. All dimensions nominal. Continuous development and refinement of our products may result in specification changes without notice. Copyright © 2024 Kulite Semiconductor Products, Inc. All Rights Reserved. Kulite miniature pressure transducers are intended for use in test and research and development programs and are not necessarily designed to be used in production applications. For products designed to be used in production programs, please consult the factory.

KULITE SEMICONDUCTOR PRODUCTS, INC. • One Willow Tree Road • Leonia, New Jersey 07605 • Tel: 201 461-0900 • Fax: 201 461-0990 • www.kulite.com

