




FLANGE MOUNT ULTRAMINIATURE 5V OUTPUT PRESSURE TRANSDUCER WITH INTEGRATED TEMPERATURE SENSOR


KZSL/T-400 SERIES

- Combined Pressure and Temperature Capability
- Robust Construction
- Excellent Long Term Stability
- Patented Leadless Technology VIS®
- Designed For Industrial And Automotive Applications

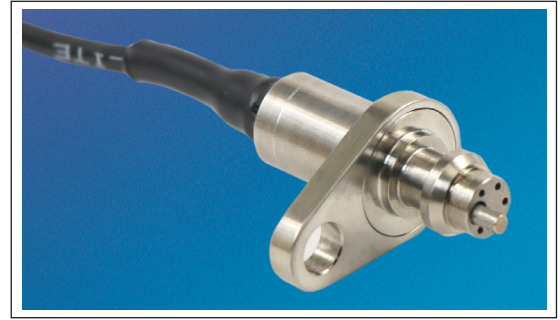

The KZSL/T-400 is a miniature flange mount pressure transducer/platinum RTD combination. The pressure transducer utilizes a patented silicon on silicon design. The platinum RTD protrudes beside the diaphragm to sense media temperature. The pressure and temperature devices are designed to operate independently. All wetted parts of the transducer are compatible with most automotive fluids.

Part performance not guaranteed if used in water. For Installation Drawing, refer to **Installation Standard Series**, Page 3.

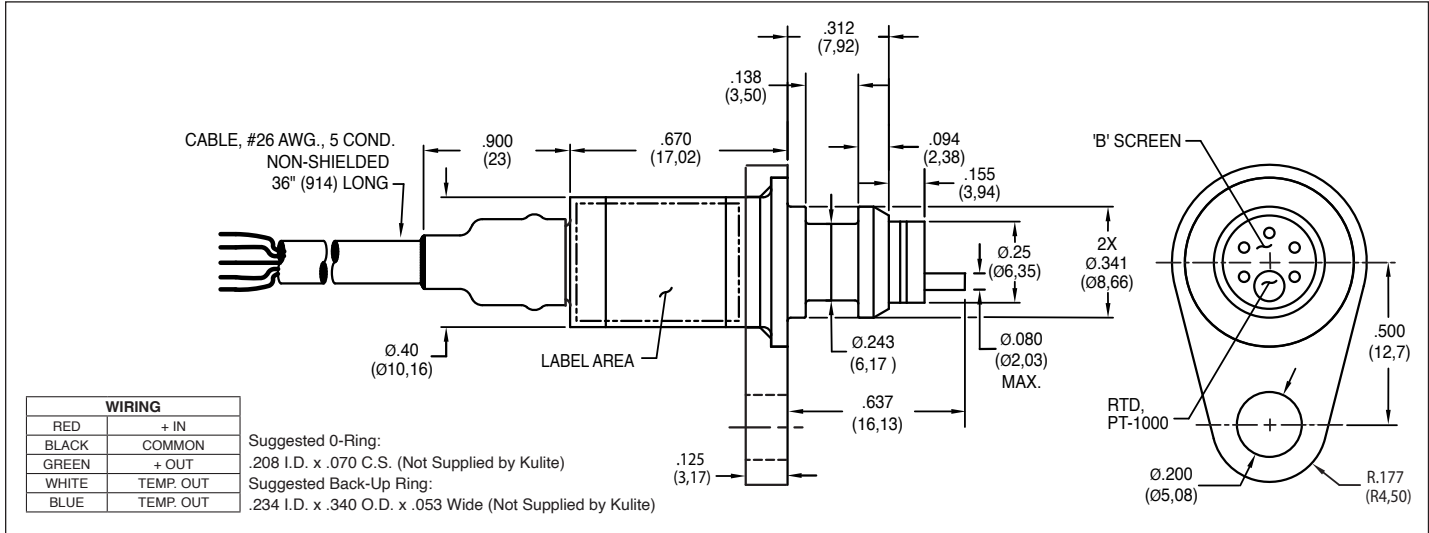

INPUT	Pressure Range	2 29	5 72	10 145	15 217	20 290	50 725	100 1450	150 2175	200 2900	250 BAR 3626 PSI	
	Operational Mode	Absolute, Sealed Gage										
	Over Pressure	2 Times Rated Pressure to 500 PSI (35 BAR) 1.5 Times Rated Pressure Above 500 PSI (35 BAR)										
	Burst Pressure	3 Times Rated Pressure To a Maximum of 7500 PSI (517 BAR)										
	Pressure Media	Any Liquid or Gas Compatible with 15-5 S/S, Kovar and SiO ₂										
	Maximum Electrical Current	25 mA										
	Rated Electrical Excitation	8 to 16 VDC										
	RTD Excitation	0.3mA (1mA Max.)										
OUTPUT	Full Scale Reading	4.5V ± 1.5% (3 Wire System Single Ended Output)										
	Residual Unbalance	0.5V ± 75mV										
	Output Impedance	<1000 Ohms										
	RTD	1000 Ohms Platinum, DIN EN 60751 Tables, Class A (65% Response Time 3 Seconds Max.) in Liquid										
	Sensor Response Time	0.7 ms (Nom.)										
	Combined Non-Linearity, Hysteresis and Repeatability	± 0.1% BFSL (Typ.), ± 0.25% BFSL (Max.)										
ENVIRONMENTAL	Resolution	Infinitesimal										
	Insulation Resistance	100 Megohm Min. @ 50 VDC										
	Operating Temperature Range	-67°F to +365°F (-55°C to +185°C)										
	Compensated Temperature Range	+68°F to +347°F (+20°C to +175°C)										
	Total Error Band (Excluding End Points)	± 2% FS/100°C					± 1% FS/100°C					
PHYSICAL	Linear Vibration	50g Peak, Sine 130-5000 Hz. (Max.)										
	Mechanical Shock	20g half Sine Wave 11 msec. Duration										
	Electrical Connection	5 Conductor 26 AWG Non-Shielded Cable 36" (914) Long										
	Weight	15 Grams (Nom) Excluding Cable										
Pressure Sensing Principle	Fully Active Four Arm Wheatstone Bridge Dielectrically Isolated Silicon on Silicon Patented Leadless Technology											

Note: Custom pressure ranges, accuracies, mechanical configurations and RTD resistance available. Dimensions are in inches. Dimensions in parenthesis are in millimeters. All dimensions nominal. (E) Continuous development and refinement of our products may result in specification changes without notice. Copyright © 2022 Kulite Semiconductor Products, Inc. All Rights Reserved. Kulite miniature pressure transducers are intended for use in test and research and development programs and are not necessarily designed to be used in production applications. For products designed to be used in production programs, please consult the factory.