




# THIN LINE PRESSURE TRANSDUCER

## LQ-30-125 SERIES

- High Natural Frequency
- Silicon on Silicon Integrated Sensor **VIS®**
- Excellent Stability
- Ideal For Flight Test & Wind Tunnel Applications

The LQ Series demonstrates Kulite's ability to provide pressure transducers suited for adaptation into custom packages. These devices can be integrated into various test articles such as fan blades, engine nozzles of various types, etc. The features of these transducers include small foot print, high natural frequency, extreme resistance to vibration and shock, and wide temperature range.

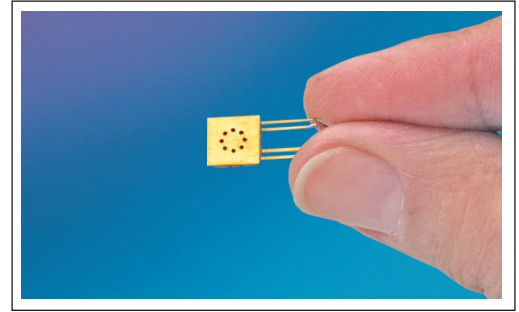

Kulite recommends the [KSC Series](#) of signal conditioners to maximize the measurement capability of the LQ-30-125 transducer.

WIRING	
COLOR	DESIGNATION
RED	+ INPUT
BLACK	- INPUT
GREEN	+ OUTPUT
WHITE	- OUTPUT

Technical drawing showing dimensions: .060 NOM. (1.5), .252 (6.4), .020 DIA. (.5) 8 HOLES EQUALLY SPACED ON .110 DIA. (2.8) TYP., .252 (6.4), .300 (7.6), .020 (.5), .005 (.13), .050 (1.3). CAN BE SUPPLIED WITH "M" SCREEN.

COMPENSATION MODULE .110 DIA. X 1" (2.8 X 25.4) LONG FOR 36 AWG LEADS. 4 LEADS TEFLON INSULATED #36 AWG 12" (305) LONG AFTER COMP. MODULE. 4 LEADS TEFLON INSULATED #36 AWG 24" (610) LONG BEFORE COMP. MODULE.

<b>INPUT</b>	Pressure Range	0.35 5	0.7 10	1 15	1.7 25	3.5 50	7 100	17 250	35 BAR 500 PSI
	Operational Mode	Absolute			Absolute, Sealed Gage			Absolute, Sealed Gage	
	Over Pressure	2 Times Rated Pressure							
	Burst Pressure	3 Times Rated Pressure							
	Pressure Media	All Nonconductive, Noncorrosive Liquids or Gases							
	Rated Electrical Excitation	10 VDC							
	Maximum Electrical Excitation	12 VDC							
	Input Impedance	1000 Ohms (Min.)							
<b>OUTPUT</b>	Output Impedance	1000 Ohms (Nom.)							
	Full Scale Output (FSO)	100 mV (Nom.)							
	Residual Unbalance	± 5 mV (Typ.)							
	Combined Non-Linearity, Hysteresis and Repeatability	± 0.1% FSO BFSL (Typ.), ± 0.5% FSO (Max.)							
	Resolution	Infinitesimal							
	Natural Frequency of Sensor Without Screen (KHz) (Typ.)	150	175	200	240	300	380	550	700
<b>ENVIRONMENTAL</b>	Acceleration Sensitivity % FS/g Perpendicular	1.5x10 <sup>-3</sup>	1.0x10 <sup>-3</sup>	6.5x10 <sup>-4</sup>	5.0x10 <sup>-4</sup>	3.0x10 <sup>-4</sup>	1.5x10 <sup>-4</sup>	1.0x10 <sup>-4</sup>	6.0x10 <sup>-5</sup>
	Insulation Resistance	100 Megohm Min. @ 50 VDC							
	Operating Temperature Range	-65°F to +250°F (-55°C to +120°C)							
	Compensated Temperature Range	80°F to 180°F (25°C to 80°C) Any 100°F Range within The Operating Range on Request							
	Thermal Zero Shift	± 1% FS/100°F (Typ.)							
	Thermal Sensitivity Shift	± 1% /100°F (Typ.)							
	Linear Vibration	20g Peak, Sine 10 to 2000 Hz							
Mechanical Shock	20g Half Sine Wave 11 msec. Duration								
<b>PHYSICAL</b>	Electrical Connection	4 Leads 36 AWG 36" (914) Long (36 AWG Shielded Teflon Cable Optional)							
	Weight	.2 Gram (Nom.) Excluding Module and Leads							
	Pressure Sensing Principle	Fully Active Four Arm Wheatstone Bridge Dielectrically Isolated Silicon on Silicon							

Note: Custom pressure ranges, accuracies and mechanical configurations available. Dimensions are in inches. Dimensions in parenthesis are in millimeters. All dimensions nominal. (M) Continuous development and refinement of our products may result in specification changes without notice. Copyright © 2014 Kulite Semiconductor Products, Inc. All Rights Reserved. Kulite miniature pressure transducers are intended for use in test and research and development programs and are not necessarily designed to be used in production applications. For products designed to be used in production programs, please consult the factory.