



HIGH TEMPERATURE 5 VDC OUTPUT PRESSURE TRANSDUCER


ETL-HT-375 (M) CO SERIES

- 5 VDC Output
- 350°F Temperature Capability
- Hybrid Microelectronic Regulator-Amplifier
- Patented Leadless Technology
- All Welded Construction
- Secondary Containment On Absolute And Sealed Gage Units
- 3/8-24 UNJF or M10 X 1 Thread
- 3 Wire



ETL-HT-375(M) CO Series transducers are miniature, threaded flush instruments. The sensing sub-assembly is protected from mechanical damage by a solid screen which has been shown to have minimal influence on the frequency response of the sensor. The ETL Series uses Kulite's Patented Leadless Technology. Incorporation

of a Kulite proprietary electronics module within the main body of this product allows for operation from an unregulated power supply of 12 ± 4 VDC or 28 ± 4 VDC. Standard output is a stable, low noise 0 to 5 VDC signal.

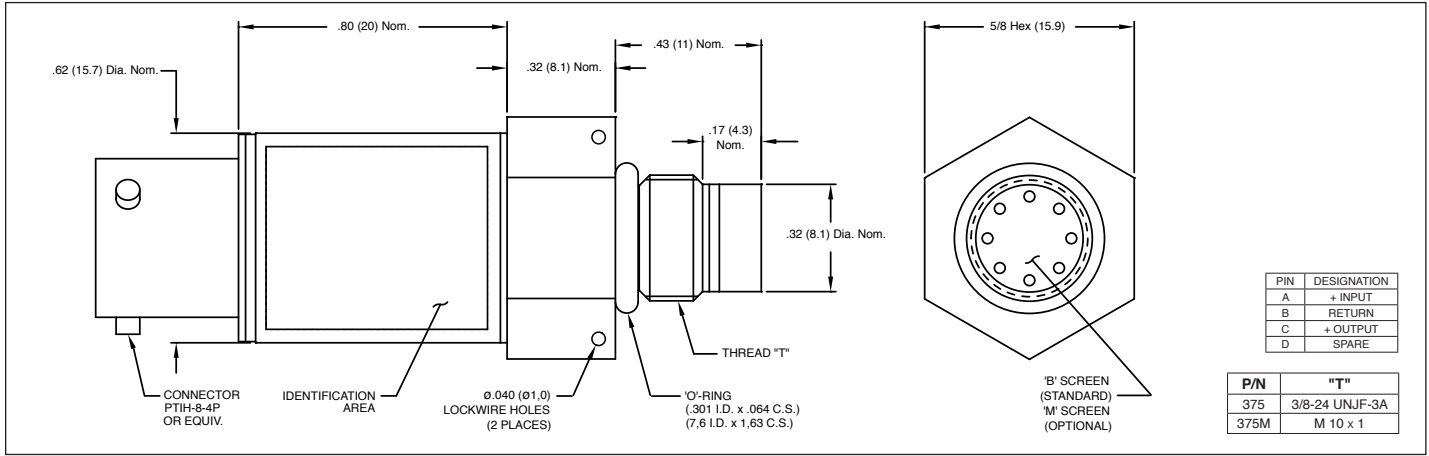

	1.7 25	3.5 50	7 100	17 250	
INPUT	Pressure Range				
	Operational Mode	Absolute, Sealed Gage			
	Over Pressure	2 Times Rated Pressure			
	Burst Pressure	3 Times Rated Pressure			
	Pressure Media	Most Conductive Liquids and Gases - Please Consult Factory (All Media May Not Be Suitable With O-Ring Supplied)			
	Rated Electrical Excitation	12 ± 4 VDC or 28 ± 4 VDC			
	Maximum Electrical Current	25 mA			
OUTPUT	Output Impedance	200 Ohms (Max.)			
	Full Scale Output (FSO)	$5 V \pm 3\%$			
	Bandwidth (-3dB)	DC to 3 KHz			
	Residual Unbalance	$200 \text{ mV} \pm 50 \text{ mV}$			
	Combined Non-Linearity, Hysteresis and Repeatability	$\pm 0.1\%$ FSO BFSL (Typ.), $\pm 0.5\%$ FSO (Max.)			
	Resolution	Infinitesimal			
	Natural Frequency (KHz) (Typ.)	Greater Than 175 KHz			
	Acceleration Sensitivity % FS/g Perpendicular	1.9×10^{-3}	1.0×10^{-3}	5.2×10^{-4}	2.2×10^{-4}
	Insulation Resistance	100 Megohm Min. @ 50 VDC			
	ENVIRONMENTAL	Operating Temperature Range	-65°F to $+350^\circ\text{F}$ (-55°C to $+175^\circ\text{C}$)		
Compensated Temperature Range		-40°F to $+350^\circ\text{F}$ (-40°C to $+175^\circ\text{C}$) Other Ranges Quoted on Request			
Thermal Zero Shift		$\pm 1\%$ FS/100° F (Typ.)			
Thermal Sensitivity Shift		$\pm 1\%$ /100° F (Typ.)			
Linear Vibration		100g Peak, Sine up to 5000 Hz			
Altitude		-150 ft. to $+70,000 \text{ ft.}$ Will Not Damage Sensor			
Humidity		100% Relative Humidity			
PHYSICAL	Mechanical Shock	100g half Sine Wave 11 msec. Duration			
	Electrical Connection	PTIH-8-4P or Equivalent (Mating Connector Available Upon Request)			
	Weight	24.5 Grams (Max.) Excluding Cable			
	Pressure Sensing Principle	Fully Active Four Arm Wheatstone Bridge Dielectrically Isolated Silicon on Silicon Patented Leadless Technology			
	Mounting Torque	80 Inch-Pounds (Max.)			

Note: Custom pressure ranges, accuracies and mechanical configurations available. Dimensions are in inches. Dimensions in parenthesis are in millimeters. All dimensions nominal. Continuous development and refinement of our products may result in specification changes without notice. Copyright © 2020 Kulite Semiconductor Products, Inc. All Rights Reserved. Kulite miniature pressure transducers are intended for use in test and research and development programs and are not necessarily designed to be used in production applications. For products designed to be used in production programs, please consult the factory.