




SUBMINIATURE HIGH TEMPERATURE PRESSURE TRANSDUCER


XTE-140 (M) SERIES

- Wide Temperature Capability -65°F To 525°F
- Easy Installation
- Smallest Threaded Device Available
- Silicon on Silicon Integrated Sensor **VIS®**
- High Natural Frequency

The XTE-140 Series uses a standard miniature silicon diaphragm to obtain extremely high natural frequencies in the smallest thread mount available. This transducer is well suited for both dynamic and static pressure measurements in benign or harsh environments. Its wide operating range (-65°F to +525°F) makes it ideal for numerous applications in Aerospace and other areas of industry.

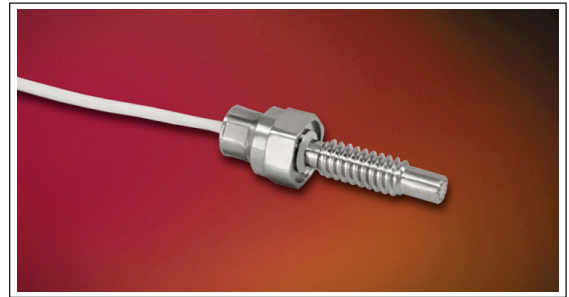

Kulite recommends the **KSC Series** of signal conditioners to maximize the measurement capability of the XTE-140 transducer.

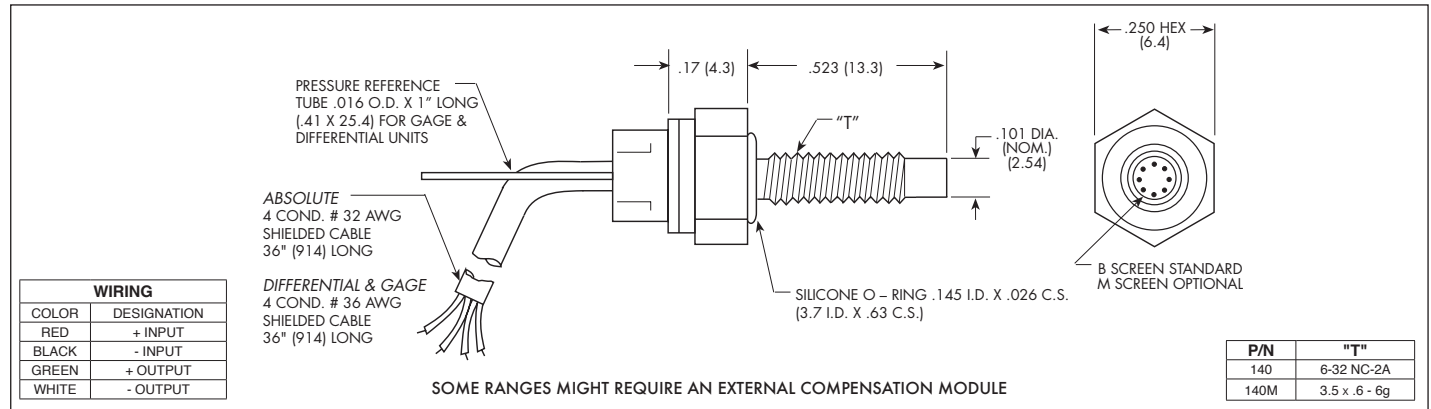

WIRING	
COLOR	DESIGNATION
RED	+ INPUT
BLACK	- INPUT
GREEN	+ OUTPUT
WHITE	- OUTPUT

INPUT	Pressure Range	.35 5	0.7 10	1.0 15	1.7 BAR 25 PSI
	Operational Mode	Absolute, Gage, Differential		Absolute, Gage, Sealed Gage, Differential	
	Over Pressure	2 Times Rated Pressure			
	Burst Pressure	3 Times Rated Pressure			
	Pressure Media	All Nonconductive, Noncorrosive Liquids or Gases (All Media May Not Be Suitable With O-Ring Supplied)			
	Rated Electrical Excitation	10 VDC			
	Maximum Electrical Excitation	12 VDC			
	Input Impedance	1000 Ohms (Min.)			
	Output Impedance	1000 Ohms (Nom.)			
	Full Scale Output (FSO)	100 mV (Nom.)			
OUTPUT	Residual Unbalance	± 5 mV (Typ.)			
	Combined Non-Linearity, Hysteresis and Repeatability	± 0.1% FSO BFSL (Typ.), ± 0.5% FSO (Max.)			
	Resolution	Infinitesimal			
	Natural Frequency of Sensor Without Screen (KHz) (Typ.)	150	175	200	240
	Acceleration Sensitivity % FS/g Perpendicular	1.5x10 ⁻³	1.0x10 ⁻³	6.5x10 ⁻⁴	5.0x10 ⁻⁴
	Insulation Resistance	100 Megohm Min. @ 50 VDC			
ENVIRONMENTAL	Operating Temperature Range	-65°F to +525°F (-55°C to +273°C) (Media) -65°F to +450°F (-55°C to +232°C) (Ambient)			
	Compensated Temperature Range	+80°F to +450°F (+25°C to +232°C)			
	Thermal Zero Shift	± 1% FS/100°F (Typ.)			
	Thermal Sensitivity Shift	± 1% /100°F (Typ.)			
	Mechanical Shock	20g Half Sine Wave 11 msec. Duration			
PHYSICAL	Linear Vibration	20g Peak, Sine 10 to 2000 Hz			
	Electrical Connection	4 Conductor 36 AWG Cable 36" Long			
	Weight	3 Grams (Nom.) Excluding Cable			
	Pressure Sensing Principle	Fully Active Four Arm Wheatstone Bridge Dielectrically Isolated Silicon on Silicon			
Mounting Torque	15 Inch-Pounds (Max.) 1.7 Nm				

Note: Custom pressure ranges, accuracies and mechanical configurations available. Dimensions are in inches. Dimensions in parenthesis are in millimeters. All dimensions nominal. (N) Continuous development and refinement of our products may result in specification changes without notice. Copyright © 2014 Kulite Semiconductor Products, Inc. All Rights Reserved. Kulite miniature pressure transducers are intended for use in test and research and development programs and are not necessarily designed to be used in production applications. For products designed to be used in production programs, please consult the factory.